

Renegade 2018-2019 Headlight support bracket replacement.

Models affected 2018-2019 Renegade models (regular and xmr models)

On the 2018 and 2019 models Can-am have switched the high and low beam position so we had to make new aluminium brackets to match the ones installed on the 2012-2017 models. Replacing them is very simple. Everything in the instructions is correct so what you need to do is to just swap out the aluminium brackets as the instructions shows. After that it's a straight on installation according to the instructions that came with the lights.

As the Neutrino lights are 40 degree flood beam on both high and low beam you can choose the one you want to use as high or low beam by switching the connectors.

Below is a comparison between the 2012-2017 headlights (backside of plastics RHD) and the 2018-2019 headlights.



See comparison picture below between the 2012-2017 oe aluminium brackets and the replacement brackets from RJWC. The RJWC brackets don't have the pressed pattern on the brackets (see adjustment info below) . Below is the correct installation and alignment.



Below is instructions on how you loosen and tighten the plastic tabs that holds the alloy brackets in place. Use a plier to turn them into position and also use the plier to keep them in place while adjusting.



Hold the plastic tabs in place with a plier





Make sure plastic tabs are "locked in place"


Plastic tabs need to be in this position to stay firmly in place

We highly recommend that you adjust the brackets according to our instructions below to not having to to that when the lights are installed. The lights have a 40 degree flood pattern so the adjustments is "accurate" like picture below shows.

Both adjustment bolts on each light is being adjusted in the same way/height.

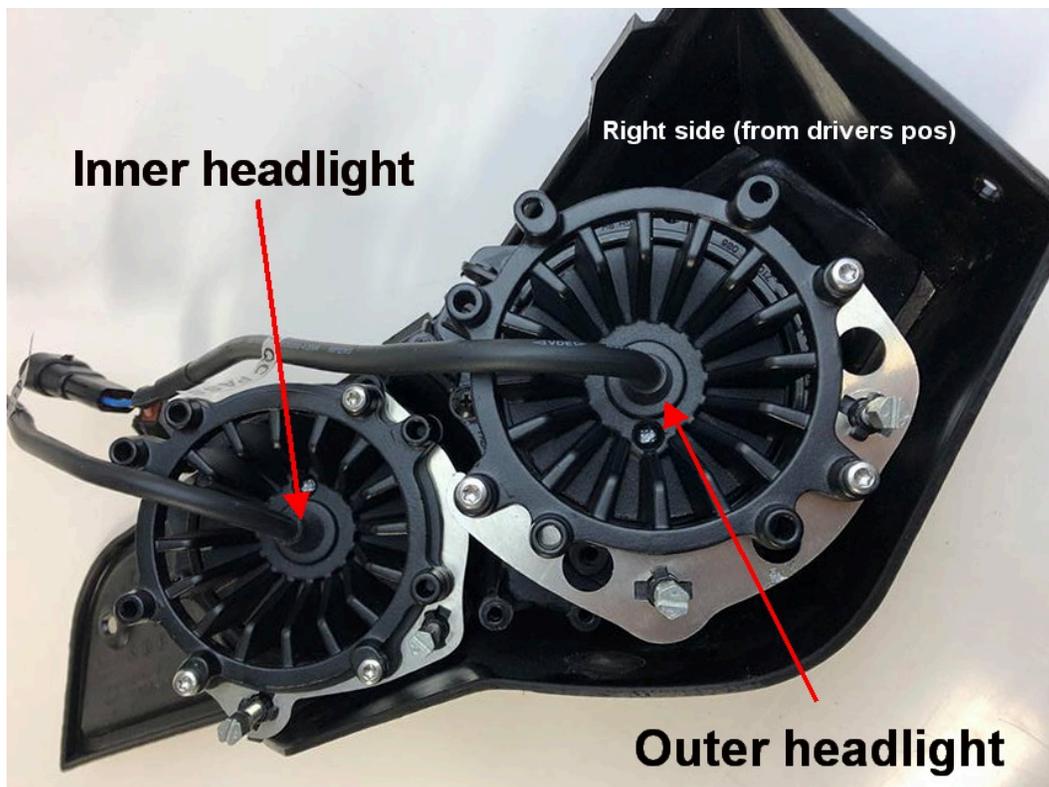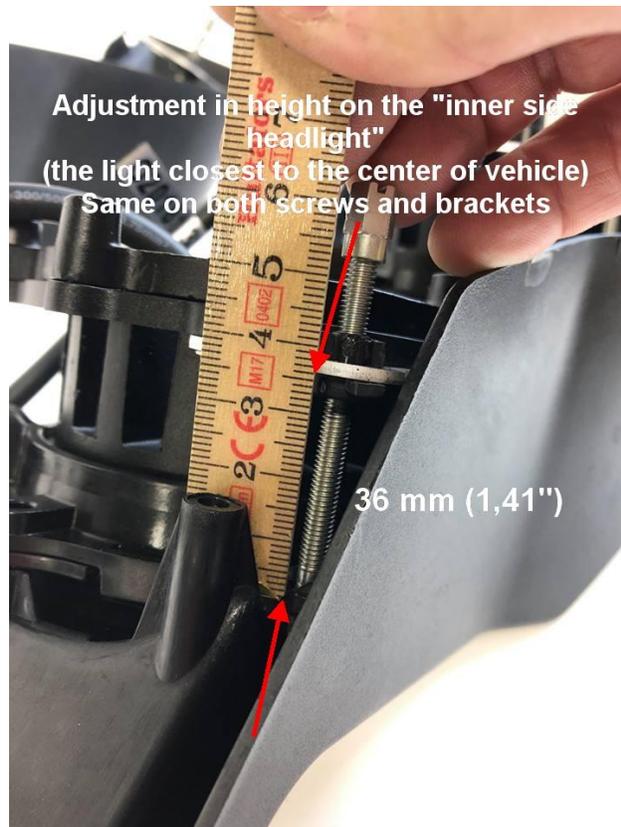

Use a 4 mm allen key (or similar) while doing the adjustments on the RJWC replacement brackets so that the plastic tabs don't slide out of position

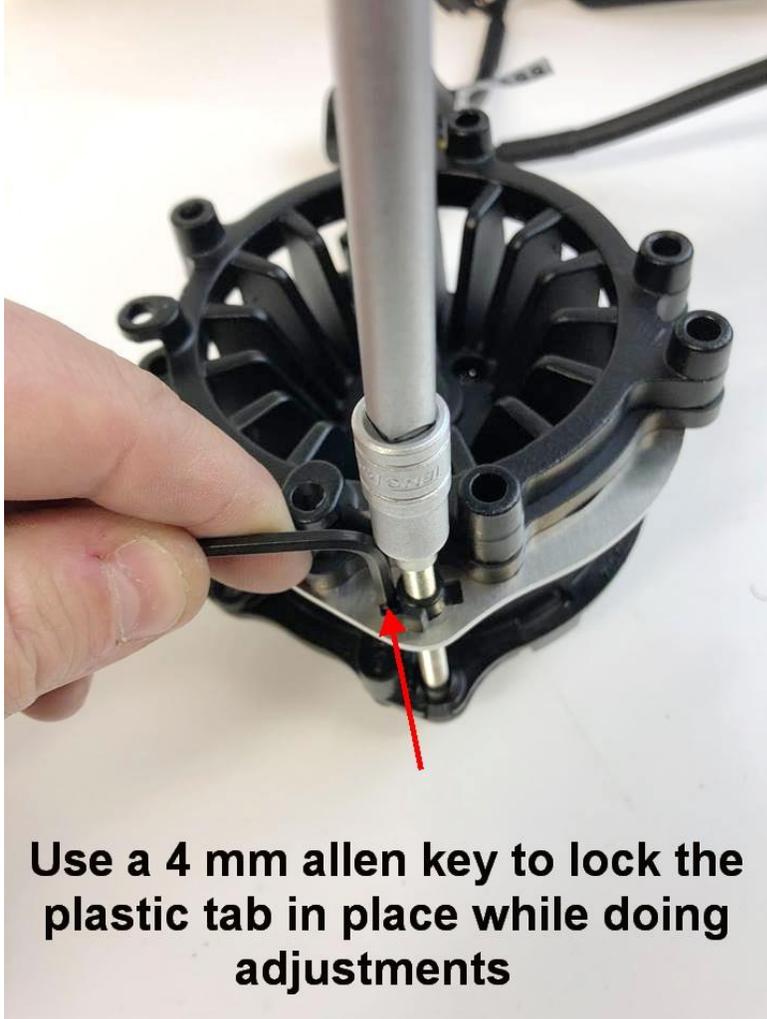

Be careful and keep the tabs in place while doing adjustment

Below is the correct alignment and installation of the lights . NOTE no bolts ,screws or nuts are tightened in the picture. It is just to show the installation and alignment of lights. See the complete instructions for more information to tighten everything correct



RJ Weld & Custom ab Bullereden 9
96167 Boden ,Sweden
info@rjwc.se

Contact rjwc or your dealer for more information regarding this matter.

Notes